

学生系列生物显微镜 / STUDENT SERIES BIOLOGICAL MICROSCOPE



▲ XSP-L101 ▲ XSP-101 ▲ XSP-12 ▲ XSP-13A

项目 ITEMS	规格 SPECIFICATION	XSP-L101	XSP-101	XSP-12	XSP-13A
目镜 Eyepiece	H5X、H10X、H12.5X H5X、H10X、H15X H10X、H12.5X H10X、H16X	●	●	●	●
物镜 Objective	消色差 5X、10X、45X (弹簧) Achromatic 5X、10X、45X (S) 消色差 4X、10X、40X (弹簧) Achromatic 4X、10X、40X (S) 消色差 10X、40X、100X (弹簧, 油) Achromatic 10X、40X、100X (S, Oil)	●	●	●	●
观察头 Viewing Head	单目头 Monocular Head	●	●	●	●
转换器 Nosepiece	三孔 Triple	●	●	●	●
载物台 Mechanical Stage	简易平台带压片 Plain Stage with Slide Clips 圆工作台带压片 Round Plain Slide with Stage Clips 单层平台带移动尺 Stage with Moving Scale	●	●	●	●
聚光镜 Condenser	阿贝聚光镜 NA 1.25 带可变光栏 Abbe Condenser N.A 1.25 with Iris Diaphragm	●	●	●	●
调焦 Focusing	分开式粗微调焦 Focusing: Separate Coarse and Fine Adjustment	●	●	●	●
照明系统 Illumination	转盘光栏、平凹反光镜 Disc Diaphragm、Plan-concave mirror 插入式光源 Insert Illumination	●	●	●	●

注 / Note: ●标准配置 / Standard Outfit ○选购配置 / Optional


SHBDS 系列倒置生物显微镜 / SHBDS SERIES INVERTED BIOLOGICAL MICROSCOPE



▲ SHBDS-400



SHBDS 系列倒置生物显微镜 / SHBDS SERIES INVERTED BIOLOGICAL MICROSCOPE

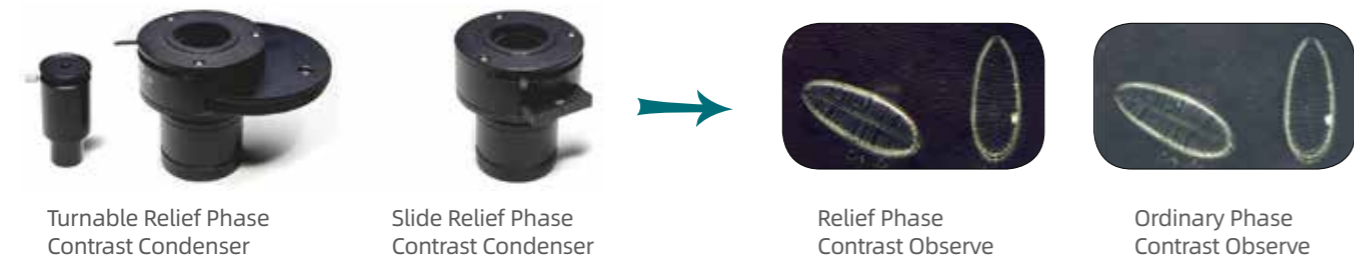

项目 ITEMS	规格 SPECIFICATION	SHBDS400
目镜 Eyepiece	WF10× / 22mm	●
长工作距离无限远平场物镜 LWD Infinity Plan Objectives	LPL 4× / 0.11 W.D.=12.1mm	○
	LPLAN 10× / 0.25 W.D.=8.3mm	●
	LPLAN 20× / 0.40 W.D.=7.2mm	●
长工作距离无限远相衬物镜 LWD Infinity Plan Phase Contrast Objectives	LPLAN 40× / 0.60 W.D.=3.4mm	●
	LPL Ph P 4× / 0.10 W.D.=9.2mm	○
	LPL Ph P 10× / 0.25 W.D.=8.3mm	○
相衬环板 Annular Spot	LPL Ph P 20× / 0.40 W.D.=7.2mm	●
	LPL Ph P 40× / 0.60 W.D.=3.4mm	○
	10×/20×/ 40× 4×	● ○
观察头 Viewing Head	45°倾斜, 360°旋转, 瞳距 48-76mm 两档转换: 100% 观察; 20% 观察, 同时 80% 摄影 Inclined 45°, interpupillary distance: 48-76mm Light distribution (both): 100: 0 (100% for eyepiece) 80:20 (80% for trinocular head, and 20% for eyepiece)	●
转换器 Nosepiece	五孔 Quintuple	●
平台 Mechanical Stage	机械移动平台尺寸: 210×241mm, 圆性载物片规格: Φ110mm, 可用于 96 孔板的机械尺行程: 128×80mm。 Stage size: X×Y: 210×241mm, Round slide size: Φ110mm, Attached mechanical stage (available for 96 holes plate, moving range X×Y: 128×80mm.)	●
培养皿托板 Culture Dish Holder	65mm	○
	54mm	●
	35mm	○
聚光镜 Condenser	血细胞计数器 blood cell counter	○
柯勒照明 Koehler Illumination	长工作距离聚光镜 (可快速拆卸) N.A.0.3, 工作距离 72mm, 移去聚光镜时工作距离 195mm Long working distance, Quickly detachable, N.A.0.3, Working distance: 72mm (with condenser), 195mm (without condenser).	●
	6V/30W (宽电压输入: 100V ~ 240V) 6V/30W (input voltage: 100V ~ 240V)	●
相机接口 C-mount	5WLED, 宽电压输入: 100V ~ 240V 5WLED, input voltage: 100V ~ 240V	○
	1 X /0.5X /0.75X C-Mount (可调焦) 1 X /0.5X /0.75X C-Mount (focus adjustable)	○
荧光装置 Epi Fluorescence Illumination	反射荧光装置, 带可变视场光阑, 可调中心 Epi fluorescence media unit, field diaphragm, center adjustable.	○
	100W 直流汞灯, 5WLED(宽电压输入: 100V ~ 240V) 100W mercury lamp, 5WLED(input voltage: 100V ~ 240V)	○
	B, G, V, UV 滤色片可选 B, G, V, UV fluorescence filters can be chosen	○

注 / Note: ●标准配置 / Standard Outfit ○选购配置 / Optional

金相显微镜 / Metallurgical Microscope



▲ XJS-300

▲ XJS-500